

# EZL-200F Summary Data Sheet




Secure Serial Device Server  
 10/100Base-T Interface  
 1 serial port (RS232/422/485)  
 SSL Secure Communication  
 Multi Monitoring  
 firmware downloadable via TFTP and Serial  
 DHCP, PPPoE support  
 easy configuration (ezConfig)  
 AT command emulation support  
 management via telnet

## Specifications

Power	Input Voltage	5V $\pm$ 0.5V
	Current	320 mA typical
Dimension	136mm x 83mm x 29mm	
Weight	about 140g	
Interface	Serial	9pin Dsub male
	Ethernet	10/100Base - TRJ45
Serial	RS232 (1200bps ~ 115200bps), RS422(Full Duplex), RS485(Half Duplex)	
Ethernet	10/100Base-T Auto-Sensing, Auto MDI/MDIX	
Protocols	TCP, UDP, IP, ICMP, ARP, TELNET, DHCP, PPPoE	
Secure Protocols	SSL 3.0 , TLS 1.0	
Communication Modes	T2S	TCP, Server mode
	COD	TCP, Client mode
	ATC	TCP, Server/Client (AT emulation)
	U2S	UDP
Utilities	ezConfig	configuration utility
	Hotflash	firmware download utility
	Ezterm	socket communication test utility

## System Diagram

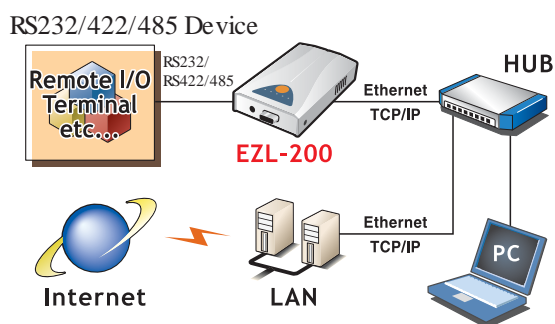

## Applications

remote monitoring systems  
 remote metering systems  
 remote fire fighting equipment systems  
 air circulator remote control  
 ATM systems  
 health check systems  
 security systems  
 traffic display systems  
 etc.

